

**CheoyLee**®

EFFECTIVE DATE  
February 1, 1988

**CHEOY LEE/PEDRICK 36**

## CHEOYLEE/PEDRICK 36 SAILING YACHT Specifications<sup>(A)</sup>

Length Overall	35' 10"	10.97m	Displacement <sup>(B)</sup>	16,000 lbs	7,256 kg
Length Waterline	28' 10"	8.84m	Fuel <sup>(B)</sup>	50 USG	189 ltr
Beam	11' 5"	3.51m	Water <sup>(B)</sup>	100 USG	378 ltr
Draft	5' 8"	1.75m	Ballast <sup>(C)</sup>	6,350 lbs	2,879 kg
Height Above Waterline	50' 0"	15.24m	Sail Area, Sloop	613 ft <sup>2</sup>	56.97 m <sup>2</sup>
Engine:	Universal-40 (32HP)				

### STANDARD EQUIPMENT

#### Construction

- One piece molded fiberglass hull
- One piece molded fiberglass deck, mahogany cored
- Integral fiberglass fuel and water tanks
- Teak and holly cabin sole
- Hull scantlings to designer's specification
- Fiberglass taping of hull and deck joint
- Fiberglass taping of bulkheads
- AWLGRIP non-skid coachroof
- Teak interior trim and panelling
- Vinyl cabin headliner
- LEWMAR aluminum ventilating/escape hatches
- Aluminum opening ports
- Gelcoat (white) exterior finish
- Teak overlay on fiberglass deck
- Teak gratings on cockpit sole

#### Deck Hardware

- All hardware chrome on brass, stainless steel or anodized/painted aluminum
- Six (6) stainless steel cleats – two at fore deck, two spring at midship and two at aft deck
- Stainless steel bow pulpit
- Stainless steel stern pulpit
- Stainless steel stanchions
- Vinyl coated lifelines
- Opening gates, port & starboard, on life lines with pelican hooks
- Stainless steel chain pipe on fore deck
- Stainless steel stemhead fitting with rollers
- GOIOT aluminum toerails, port & starboard
- Three (3) pairs of fairleads on toerails
- Teak handrails on coach roof port & starboard
- Stainless steel genoa sheet tracks
- Five (5) anodized aluminum hatches
- One (1) teak & plexiglass companionway sliding hatch
- Three (3) black anodized aluminum opening ports
- Two (2) cowl vents
- EDSON steering system, with controls, pedestal and compass guard
- 40" diameter stainless steel wheel

#### Spar, Winches and Sheeting System

- Painted aluminum spars
- Bow/flood light on main mast
- Two (2) BARIENT 28A primary winches
- One (1) BARIENT 18A main halyard winch
- One (1) BARIENT 18A jib halyard winch
- One (1) BARIENT 21A main sheet winch
- One (1) BARIENT 8" lock-in winch handle
- Two (2) BARIENT 10" lock-in winch handles
- LEWMAR mainsheet traveller system
- Braided sheets
- Braided rope halyards
- Blocks for halyards and sheets

#### Engine Compartment and Bilge

- Diesel engine with marine gear, exhaust silencer, standard engine maker instrumentation and standard engine 55AMP alternator
- 2:1 reduction gearbox
- Stainless steel single-arm strut
- Two-bladed bronze propeller
- 1" stainless steel shaft
- 1-3/4" stainless steel rudder stock
- Mylar faced synthetic lead-foam sound insulation in engine compartment
- One (1) manual bilge pump
- One (1) automatic electric bilge pump
- One (1) electric pressure water pump
- One (1) automatic electric sump pump
- Formica counter top and locker above engine

#### Electrical System

- Two (2) banks of 12 volt heavy duty batteries, 90 amp-hrs each bank, for engine starting and ship's service
- Battery selection and paralleling switch
- 12 volt lighting fixtures
- Electric control panel with circuit breakers
- Two (2) 12 volt DC 5 amp spare circuit breakers
- Navigation lights
- 6 USG RARITAN hot water heater with engine waste heat
- Electrical bonding throughout
- Zinc anode protection
- One (1) 110 volt 30 amp shore power inlet
- Hot and cold water pressure water system

#### Salon

- Teak joinerwork
- Teak grab rails on cabin sides port & starboard
- 12 volt ceiling lights
- Lockers
- Settees port and starboard
- Drop leaf teak dining table
- 4" polyfoam cushions
- One (1) 12 volt DC outlet
- One (1) 110 volt AC outlet

#### Galley

- Teak joinerwork
- Formica counter top
- Ice box with 3" insulation
- Stainless steel double sinks
- 12 volt ceiling light
- Faucet
- Lockers
- One (1) 12 volt DC outlet
- One (1) 110 volt AC outlet

#### Chart Area

- Teak joinerwork
- Chart table
- Shelves
- Swing-out stool
- 12 volt ceiling light
- 4" polyfoam cushion
- One (1) 12 volt DC outlet
- One (1) 110 volt AC outlet

---

**Aft Bed**

---

- Teak joinerwork
- Double berth
- 4" polyfoam mattress
- 12 volt reading light
- Shelves
- Locker

---

**Forward Stateroom**

---

- Teak joinerwork
- V-berth
- 4" polyfoam mattress
- 12 volt ceiling light
- 12 volt reading lights
- Hanging locker
- Access door to chain locker
- Shelves
- Locker
- Bureau
- One (1) 12 volt DC outlet
- One (1) 110 volt AC outlet

---

**Head**

---

- Mirror
- Wash basin
- Formica panelling
- RARITAN PH marine head piped with Y-valve for discharge into holding tank or directly overboard
- Stainless steel shower curtain track
- Teak grating for shower with shower tray under
- Shower fixture
- Formica counter top
- Faucet
- Soap tray
- Toilet roll holder
- Access door to engine compartment
- One (1) 12 volt DC outlet
- One (1) 110 volt AC outlet

---


**Optional Equipment**

---

- Sails
- Compass
- Self-tailing winches
- Spinnaker pole
- Macerator pump for holding tank
- Deck pump-out fitting for holding tank
- RACOR filter/water separator for engine
- Teak toerails
- Cedar lining in hanging locker (back face)
- Anchor windlass
- Anchor chain and rode
- Anchor salt water washdown
- V-berth filler piece
- Hardwood rubrails, port & starboard, with stainless steel half round capping
- Cockpit cushions
- Shower curtain
- Teak framed mosquito screens
- Stereo and speakers
- Battery charger, 12 volt DC, 20 amp
- Cold plate refrigeration
- Electronics
- Stove/oven
- Shore power cord
- Fenders, lines, fire extinguishers, life jackets, flares
- Commissioning

**NOTES TO SPECIFICATIONS**

- Right is reserved to make changes at any time, without notice, in prices, materials, specifications and equipment. Line drawings show optional items.
- Weight shown is estimate of model's maximum weight displacement with average optional equipment aboard at time of delivery and fuel and freshwater tanks filled. Capacities of tanks are estimated to be total capacity of all tanks normally furnished in this model. Usable capacity will vary depending upon conditions.
- Ballast is internal cast iron, approximate weight.

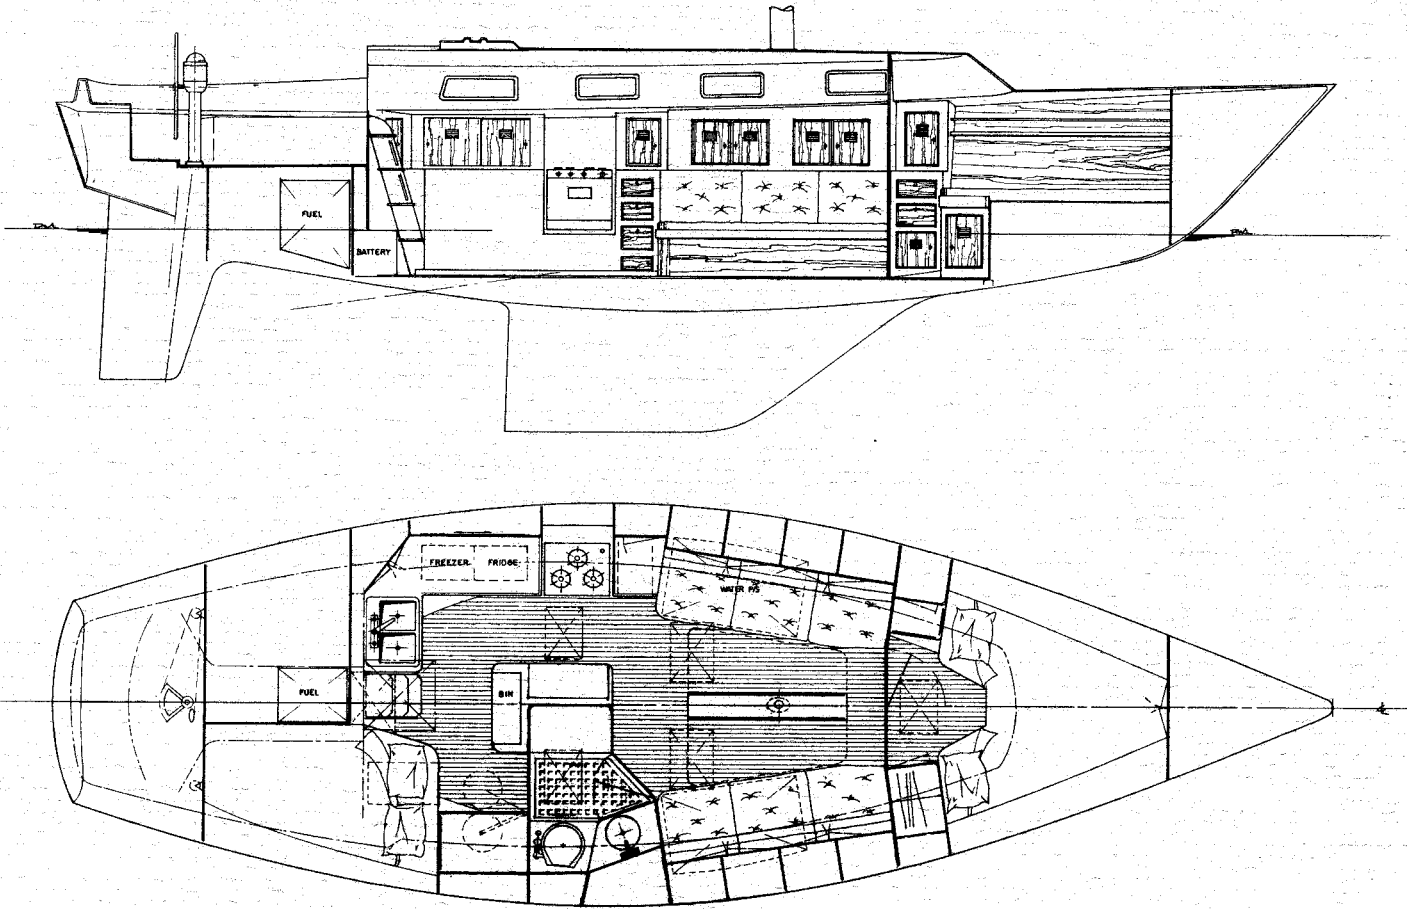

## CHEOY LEE LIMITED WARRANTY

CHEOY LEE SHIPYARDS, LIMITED ("Cheoy Lee"), P.O. Box 80040, Cheung Sha Wan Post Office, Kowloon, Hong Kong, warrants each new Cheoy Lee boat for Twelve (12) months according to the following terms:

1. This warranty extends to the original retail purchaser only, and commences from the date of the Delivery to the retail purchaser.
2. This warranty covers only the repair or replacement of defective parts, actually manufactured by Cheoy Lee and DOES NOT COVER any part or component not manufactured by Cheoy Lee:
  - a) Notice is hereby given that many parts and components, including engines, engine accessories, controls and gauges are not manufactured by Cheoy Lee;
  - b) Without obligation or liability on its part, Cheoy Lee will pass on to purchaser any warranties offered by manufacturers of such other parts and components.
3. Any part or component covered by this warranty which is or becomes defective by reason of Cheoy Lee's faulty workmanship or material will be repaired or replaced, at Cheoy Lee's option, by the dealer or authorized repair facilities. It is the duty of the purchaser to disassemble, prepare, and transport the defective part or entire boat, at purchaser's own expense, within thirty (30) days after discovery of defect, to the original dealer, or such other repair facility as Cheoy Lee may designate. Purchaser is responsible for any and all cost and expenses, except for repair or replacement of the defective part, including but not limited to, removing, packaging, shipping, and/or returning the boat or defective part for repair; storage charges, and the expense of returning any part to purchaser and reinstalling the same.
4. To obtain performance under this warranty, and as a condition precedent to any duty by Cheoy Lee hereunder, the purchaser shall:
  - a) Return the registration card attached to this warranty within thirty (30) days from the date of delivery of the boat;
  - b) Send written notice of the existence and nature of any defect immediately to the dealer from whom the boat was purchased, or if unable to reach such dealer, directly to Cheoy Lee at the address stated herein or Telex HX 56361 CLS;
  - c) Within thirty (30) days after discovery of any defect, return the defective boat or part to the person to whom such notice was sent.
5. Warranty work shall be performed only by the original dealer or such other repair facility authorized by Cheoy Lee. Any warranty information which you are unable to obtain from an authorized dealer may be obtained by writing Cheoy Lee at the address stated herein.
6. **DISCLAIMER OF WARRANTIES AND RESPONSIBILITY FOR DAMAGES:** Except as provided in this limited warranty, CHEOY LEE MAKES NO WARRANTY, EXPRESS OR IMPLIED, TO ANYONE, AS TO FITNESS FOR ANY PURPOSE, MERCHANTABILITY, DESIGN CONDITION, CAPACITY, PERFORMANCE, OR ANY OTHER ASPECT OF THE BOAT OR ITS MATERIAL OR WORKMANSHIP. ALL

IMPLIED WARRANTIES WHICH MAY EXIST, NOTWITHSTANDING THIS DISCLAIMER, ARE LIMITED IN DURATION TO THE DURATION OF THE SIX (6) MONTH PERIOD OF THIS LIMITED WARRANTY. THIS LIMITED WARRANTY IS MADE IN LIEU OF ALL OTHER GUARANTIES, WARRANTIES, REPRESENTATIONS, CONDITIONS, OBLIGATIONS, OR LIABILITIES, EXPRESS OR IMPLIED.

CHEOY LEE SHALL NOT BE LIABLE FOR THE COST OF ANY WORK DONE BY BUYER OR OTHERS ON THE CRAFT; INCIDENTAL OR CONSEQUENTIAL DAMAGES LOSS, DAMAGE, OR INJURY TO PERSONS, INCLUDING DEATH, PROPERTY, OR THINGS, OR FOR DAMAGES OF ANY KIND OR NATURE INCLUDING INCONVENIENCE OR LOSS OF ANTICIPATED PROFITS OCCASIONED BY OR ARISING OUT OF THE OPERATION, USE, MISUSE, NONUSE, REPAIR, REPLACEMENT OR DELAY IN DELIVERY OF THE CRAFT.

NOTE: Some states do not allow limitations on how long an implied warranty lasts, and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

7. Cheoy Lee assumes no responsibility for and EXCLUDES ANY LIABILITY FOR:
  - a) Any failure or defect resulting from misuse, neglect, negligence, lack of maintenance, normal wear and tear, climatic conditions, or accidents;
  - b) Any boat which is used at any time for commercial purposes, such as rental or other income producing activities;
  - c) Any boat used at any time in any contest or competitive trial of acceleration, speed, time, distance, skill, or endurance, or any form of racing whatsoever;
  - d) Boat speeds because they are estimated and not guaranteed;
  - e) Any part which has been altered in any manner that has impaired the original characteristics thereof;
  - f) Specifically manufactured parts provided to customer specifications;
  - g) Deterioration of any finish or surface, such as varnishes, paints, gelcoats, fabrics, and chrome, due to use and/or exposure to climatic conditions or air pollution.
8. This limited warranty applies only to boats sold in the United States. It gives you specific legal rights, and you may also have other rights which vary from state to state. Purchases in other countries are not covered by this limited warranty, unless expressly extended by Cheoy Lee.
9. No informal dispute settlement mechanism as defined by FTC Rule 703 is provided by Cheoy Lee.
10. Cheoy Lee reserves the right to improve its products through changes in design and material without being obligated to incorporate such changes in products of prior manufacture.
11. Cheoy Lee's authorized dealers are independent businessmen and NOT the agents of Cheoy Lee. No person, including any dealer or repair facility, has authorization, express or implied, to modify the terms of this Limited Warranty or assume on behalf of Cheoy Lee any liability or responsibility in connection with this limited warranty.

CHEOY LEE SHIPYARDS, LTD.

863-865 LAI CHI KOK ROAD, KOWLOON, HONG KONG.

TLX: HX56361 CLS FAX: 3-7455312 TEL: 3-7437710